


PRESSE Q6F



TECHNICAL AND PERFORMANCE DATA

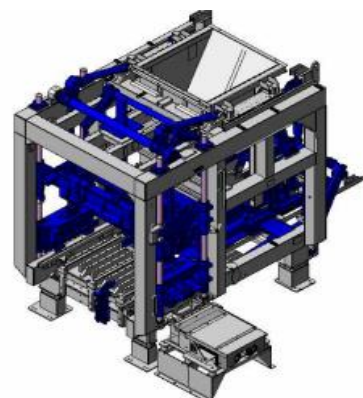

VIBRATION	DETAILED DATA
Vibrating engines 11 kW	2
Reference bars	Fixes
Adjustable vibrating force and frequency	0 à 9 000 DaN
MOULD	DETAILED DATA
Quick mould clamping	Mechanical by turning plate
TAMPER	DETAILED DATA
Mould and tamper guiding	4 column Ø 80
Tamper cleaning	Optional
Quick tamper clamping	Yes
Tamper stops	Fix with hydraulic brake
FEED BOX	DETAILED DATA
Lifting	Hydraulic by order on the console
Mobile shaking grid	Fix agitator
BOARD PUSHER	DETAILED DATA
Type	Hydraulic / optional 4 Kw motor
Board holding	Mecanical
CONCRETE HOPPER	DETAILED DATA
Description	Helmet opening with gate
Type of pump	2 300 L
HYDRAULIC	DETAILED DATA
Description	22 KW
Type of pump	Pallet
Tank capacity	300 L
Cooling	Air
MISCELLANEOUS	DETAILED DATA
Weight of the press with equipment second concrete	14 tons
Consumed electric power	86 kVA

PRODUCTION CAPACITY

PRODUCTS	SIZE	PRODUCTS NB/ CYCLE	CYCLE TIME	PRODUCTION 100%/8H	PRODUCTION SQM
Blocks 2 cavities	20x20x40	9	15	17280 units	
Blocks 2 cavities	15x20x40	12	15	23040 units	
Pavers one layer	10x20x6	36	15	69120 units	1382
Pavers two layers	10x20x6	36	18	57600 units	1152
Kerbstones T2 one layer	15x25x100	3	20	4320 units	