



www.quadra-concrete.com

FRENCH MANUFACTURER



QUADRA: CLEAR AND ACCURATE VIEW OF YOUR CONCRETE PRODUCT MANUFACTURING PLANT

Committed to serving the concrete industry, Quadra is a leading equipment manufacturer recognised for its high-performance plants and innovative solutions designed for the concrete precast industry.

Experts in automated process and utilizing a patented vibration system, Quadra designs and manufactures turn-key plants producing a wide range of concrete products (blocks, kerbstones, paving stones, slabs etc...).

- All design is carried out in-house utilizing multiple engineers all with distinct expertise (mechanical, electrical, automation, robotic, hydraulic and data processing design)

 Quadra designs your equipment based on your exact requirements and specifications.
 - The comprehensive study of your project leads to the most efficient solution and recommendation of equipment
 - The design is based on the entire range of equipment and technical services needed
 - Existing equipment and operations can be reviewed by Quadra's experienced engineers to determine the best solutions for optimizing the electrical and hydraulic equipment, increasing automation and improving vibration
- Experienced technicians are readily available ensuring excellent customer service and technical support

Quick and efficient customer service: remote maintenance, hotline support, assistance subscriptions.

Enhanced Customer Service using a collaborative platform > access to technical documents, production management in real-time, online spare parts catalogue & quote requests, customer service contact available (24/7).

On-site technicians assistance for training, technical diagnostics, production analysis, troubleshootings.

All equipment is assembled, erected and wired in our facility. We perform extensive machine testing, including adjustments and running in manual and automatic mode prior to shipment.

Innovation

Quality

Satisfaction

Performance

Expertise

Safety

Project Review & Design



Manufacturing



Assembling & Testing




Shipping



Innovation Policy

Quadra is committed with their policy to continually invest, ensuring innovation and implementation of new technology to optimize production and machine efficiency on all Quadra equipment.

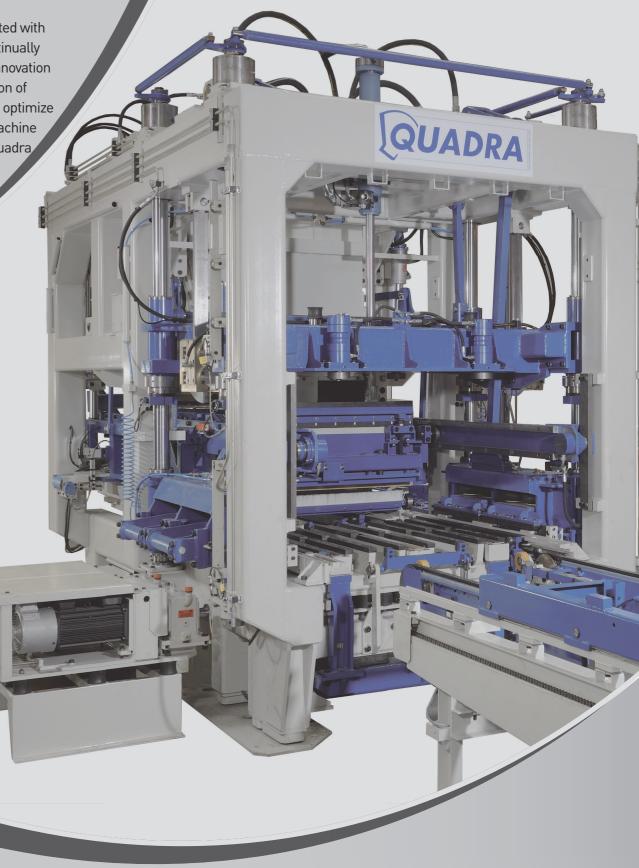

Installation



Start-up




Training



Support



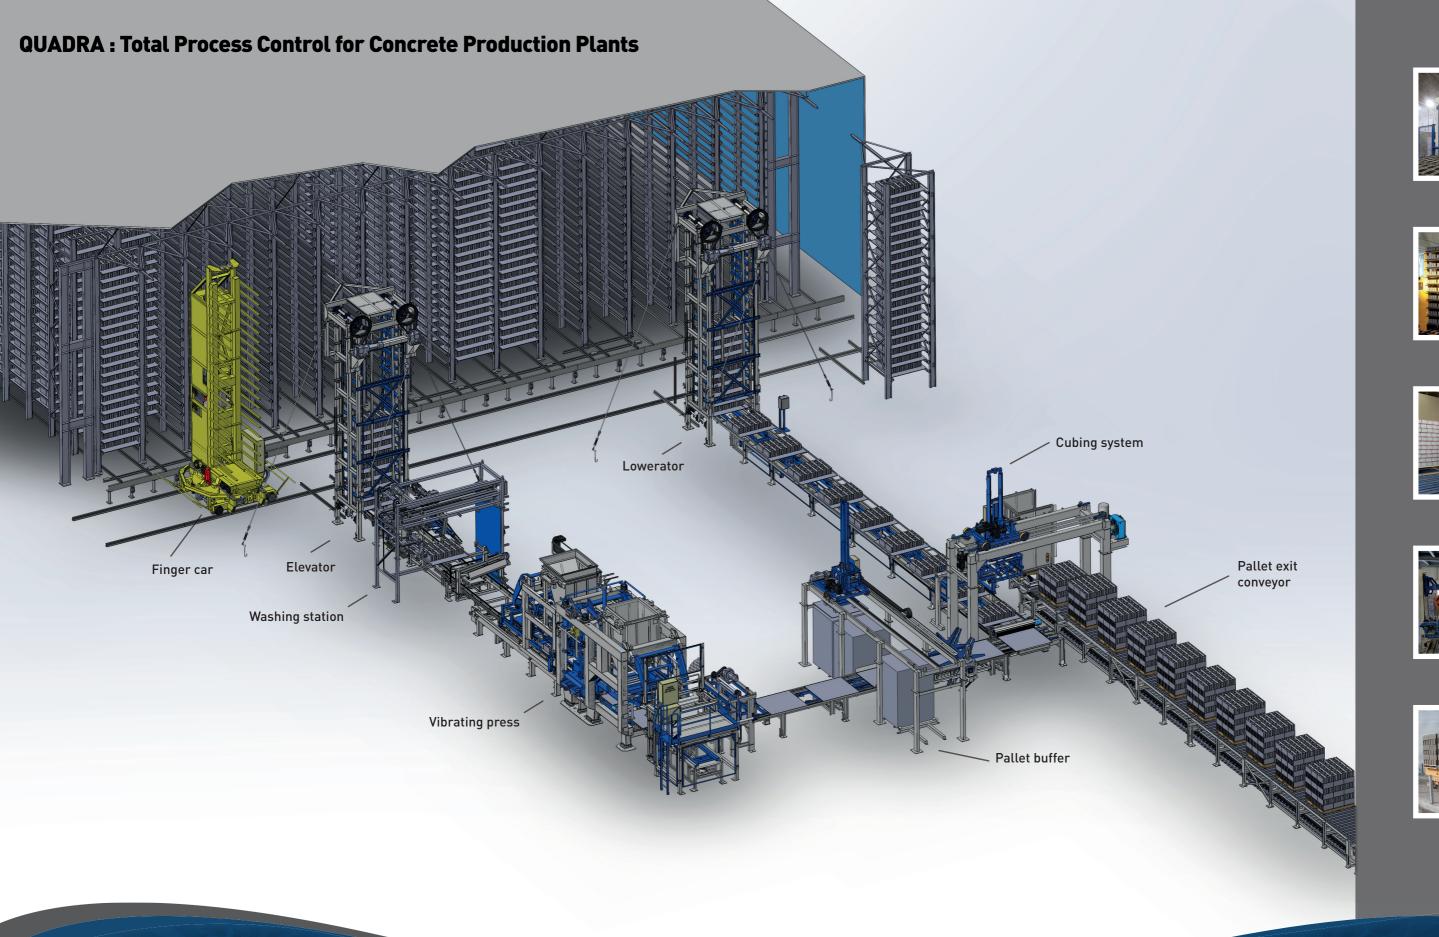



- Concrete products machines
- Product transfer and packaging systems
- Auxiliary equipment
- Grinding machines
- Batching and mixing plants

Turn-key plants
Standard or customized plants
Functional and rational design

PRODUCTION DATA

Pallet size : 1 000 x 1 000 mm

| Pallet size • | 1 2NN x RNN | or 1 200 x | 1 200 mm |
|---------------|-------------|------------|----------|

PRODUCTION DATA

| Products | Dimension (cm) | Products Nb/cycle | Cycle time (s) | Production 100% / 8h (units) | Production sqm | |
|-------------------------|-------------------------|--------------------------------------|----------------|------------------------------------|---|--|
| QUADRA 5E | Production boards : 1 | Production boards : 1 200 x 650 mm | | Production area : 1 120 x 620 mm | | |
| Blocks 2 cavity | 20 x 20 x 50 | 5 | 18 | 8 000 | | |
| Blocks 2 cavity | 15 x 20 x 50 | 7 | 18 | 11 200 | | |
| Pavers one layer | 10 x 20 x 6 | 25 | 17 | 42 353 | 847 m² | |
| Pavers two layers | 10 x 20 x 6 | 25 | 20 | 36 000 | 720 m² | |
| Kerbstones T2 one layer | 15 x 25 x 100 | 2 | 22 | 2 618 | | |
| QUADRA 5F | Production boards : 1 | Production boards : 1 200 x 650 mm | | Production area : 1 120 x 620 mm | | |
| Blocks 2 cavity | 20 x 20 x 50 | 5 | 15 | 9 600 | | |
| Blocks 2 cavity | 15 x 20 x 50 | 7 | 15 | 13 440 | | |
| Pavers one layer | 10 x 20 x 6 | 25 | 15 | 48 000 | 960 m² | |
| Pavers two layers | 10 x 20 x 6 | 25 | 18 | 40 000 | 800 m² | |
| Kerbstones T2 one layer | 15 x 25 x 100 | 2 | 20 | 4 320 | | |
| QUADRA 5 / QUADRA 5H | P Production boards : 1 | Production boards : 1 200 x 650 mm | | Production area : 1 120 x 620 mm | | |
| Block 2 cavity | 20 x 20 x 50 | 5 | 12.5 / 10 | 11 520 / 14 400 | | |
| Block 2 cavity | 15 x 20 x 50 | 7 | 12.5 / 10 | 16 128 / 20 160 | | |
| Pavers one layer | 10 x 20 x 6 | 25 | 12 / 9 | 60 000 / 80 000 | 1 200 m ² / 1 600 m ² | |
| Pavers two layers | 10 x 20 x 6 | 25 | 15 / 12 | 48 000 / 60 000 | 960 m² / 1 200m² | |
| Kerbstones T2 one layer | 15 x 25 x 100 | 3 | 18 / 16 | 4 800 / 5 400 | | |
| QUADRA 10HP | Production boards : 1 | Production boards : 1 200 x 1 150 mm | | Production area : 1 120 x 1 100 mm | | |
| Blocks 2 cavity | 20 x 20 x 50 | 10 | 12.5 | 23 040 | | |
| Blocks 2 cavity | 15 x 20 x 50 | 14 | 12.5 | 32 256 | | |
| Pavers one layer | 10 x 20 x 6 | 50 | 12 | 120 000 | 2 400 m² | |
| Pavers two layers | 10 x 20 x 6 | 50 | 15 | 96 000 | 1 920 m² | |
| Kerbstones T2 one layer | 15 x 25 x 100 | 5 | 20 | 7 200 | | |

Rates may vary based on aggregates and mix designs (±10%)

| Products | Dimension (cm) | Products Nb/cycle | Cycle time (s) | Production 100% / 8h | Production sqm | |
|-------------------------|---|------------------------------------|------------------------------------|---|---------------------|--|
| QUADRA 6F | Production boards : 1 400 x 700 mm | | | Production area : 1 320 x 650 mm | | |
| Blocks 2 cavity | 20 x 20 x 40 | 9 | 15 | 17 280 | | |
| Blocks 2 cavity | 15 x 20 x 40 | 12 | 15 | 23 040 | | |
| Pavers one layer | 10 x 20 x 6 | 36 | 15 | 69 120 | 1 382 m² | |
| Pavers two layers | 10 x 20 x 6 | 36 | 18 | 57 600 | 1 152 m² | |
| Kerbstones T2 one layer | 15 x 25 x 100 | 3 | 20 | 4 320 | | |
| QUADRA 6 / QUADRA 6HP | Production boards : 1 | Production boards : 1 400 x 700 mm | | Production area : 1 320 x 650 mm | | |
| Blocks 2 cavity | 20 x 20 x 40 | 9 | 12.5 / 10 | 20 736 / 25 920 | | |
| Blocks 2 cavity | 15 x 20 x 40 | 12 | 13 / 10 | 26 585 / 34 560 | | |
| Pavers one layer | 10 x 20 x 6 | 36 | 12 / 9 | 86 400 / 115 200 | 1 728 m² / 2 304 m² | |
| Pavers two layers | 10 x 20 x 6 | 36 | 15 / 12 | 69 120 / 86 400 | 1 382 m² / 1 728 m² | |
| Kerbstones T2 one layer | 15 x 25 x 100 | 3 | 18 / 16 | 4 800 / 5 400 | | |
| QUADRA 9 / QUADRA 9HP | Production boards : 1 400 x 900 /1 400 x 1 100 mm | | 00 mm | Production area : 1 320 x 850 /1 320 x 1 050 mm | | |
| Blocks 2 cavity | 20 x 20 x 40 | 12 | 13 / 12 | 26 585 / 28 800 | | |
| Blocks 2 cavity | 15 x 20 x 40 | 14 | 14 / 13 | 28 800 / 31 015 | | |
| Pavers one layer | 10 x 20 x 6 | 54 | 12 / 10 | 129 600 / 155 520 | 2 592 m² / 3 110 m² | |
| Pavers two layers | 10 x 20 x 6 | 54 | 15 / 13 | 103 680 / 119 631 | 2 074 m² / 2 393 m² | |
| Kerbstones T2 one layer | 15 x 25 x 100 | 5 | 20 / 18 | 7 200 / 8 000 | | |
| QUADRA 12HP | Production boards : 1 400 x 1 300 mm | | Production area : 1 320 x 1 250 mm | | | |
| Blocks 2 cavity | 20 x 20 x 40 | 18 | 13 | 39 877 | | |
| Blocks 2 cavity | 15 x 20 x 40 | 24 | 13 | 53 169 | | |
| Pavers one layer | 10 x 20 x 6 | 66 | 12 | 158 400 | 3 168 m² | |
| Pavers two layers | 10 x 20 x 6 | 66 | 15 | 126 720 | 2 534 m² | |
| Kerbstones T2 one layer | 15 x 25 x 100 | 6 | 18 | 9 600 | | |

Rates may vary based on aggregates and mix designs (±10%)

Production units designed for manufacturing a large range of concrete products












Pavers, kerbstones, blocks, slabs, and any garden & landscaping products



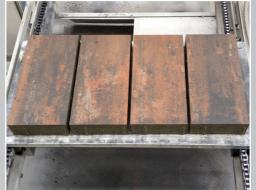







MACHINE PLACEMENT: MANY ADVANTAGES

- Machine is placed on flexible anti-vibration rubber legs
- Eliminates expenses for special machine pit or additional civil engineering
- Minimizes transmission of vibration to the floor and reduces noise
- Minimizes dynamic stress to the machine

FUNCTIONAL ARCHITECTURE

- One-piece heavy welded frame with reinforced base for heavy loads
- Elevated frame for easy access and cleaning operation
- Lower cost, easy to maintain

CONTROLLED AND PRECISE MACHINE **MOVEMENTS**

- Reliability from ability to control speed of all movements of the machine
- Easy and continuous control of all machine movements
- Optimized sequential cycle

VIBRATING SYSTEM: APPLY EXPERTISE

- One-piece vibrating table assuring consistent vibration features characteristics across the table
- Electronically controlled servo-motors located to the side of the machine
- Location allows better protection of motors and greater access

QUICK MOLD CHANGE

(less than 10 minutes)

- Automatic quick-change device for changing the mold frame and tamper head
- Quick-release clamps for the mold and the tamper head
- Automatic feedbox height adjustment for different height molds
- Option for manual movement from the control console
- Storage of settings for each mold for automatic adjustments

MACHINE HOPPER AND FEEDBOX

- · Amount of material in hopper is constantly monitored
- Hopper held in an anti-vibration mechanism
- Laser used to accurately read the amount of material in the feedbox

E

- Shaking agitator grid accelerates mold filling
- · Option to use face mix

INTUITIVE CONTROLS CONSOLE

- Touch screen terminal for adjustments and a global view of all production parameters
- Clear and comprehensive instrumentation
- Overview of all functions of the machine
- Localization and display of any errors
- Production management and product traceability


PATENTED TECHNOLOGY **HIGH PERFORMANCE VERSION** Servo-controlled High Oil Flow for fast & efficient movements **Advanced automization** Servo-controlled optimized efficiency through motor for axis interpolation of combined pallet ejection movements **Optimum Productivity and** Quality **Retractable Static Bars** (patented) Automatic product height - Increase mold life control: - Higher amplitude during fill from the controls console cycle for faster filling cycle to instantaneous adjustments

Oversized and heavy


welded frame

Oversized hydraulic

pump

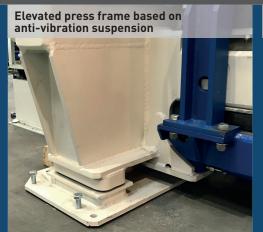



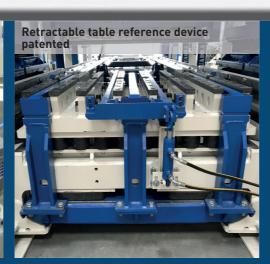



increase productivity



Clear, complete and intuitive instrumentation of the operating console

HANDLING SYSTEM

Integrated Safety & Consistent speed
Continuous operation and unlimited versatility
Versatile equipment
Easy to parameter







Cubing system














COMPLEMENTARY EQUIPMENT

Additional equipment available for increased performance, productivity, and competitiviteness.

FULLY AUTOMATED MOLD CHANGE

Efficient mold change system reducing labour and improving safety:

flexible and versatile production

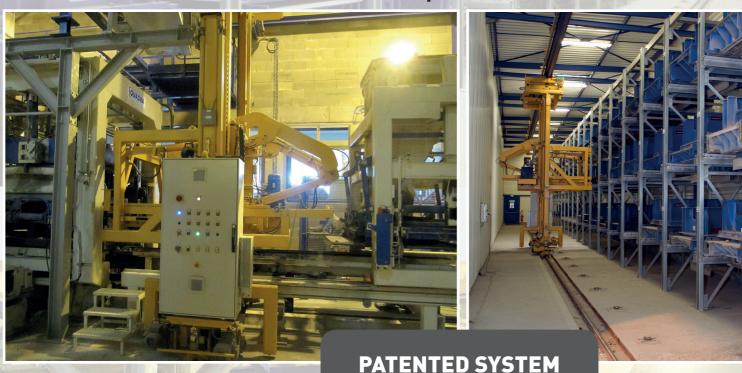

- Automated machine settings: machine settings are recorded for each mold. Tamper head, machine and feedbox are automatically adjusted for the new mold
- Production on the machine is only interrupted for 5 minutes: extreme versatility & increased productivity
- No manual handling required : providing a safer working environment
- Automatic control from the control room: the operator watchs and oversees the operation from the control
 cab. No handling operations. The operator remains in the safety area and does not need to be around the
 machine at any time.
- Automatic placement of the mold in the washing station: no fork-lift needed

WASHING STATION

Enhances the natural surface of the product

High pressure washing. Can be adapted for any size or type of products.



BLOCK TURNOVERComplete range of sizes

Integrated turnover device between the lowerator and the cubing line.



QUALITY CONTROL STATION

Product height and quality checks

A control station raises one pallet for checking height accuracy and quality, then returns it to the line never interrupting production.



ARRANGING TABLE

Versatile cubing solution

Products are selected and placed on arranging table according to the size of the pallet and the type of product to be palletized.



PROTECTION BETWEEN TIERS

Automatic spacer placement

Spacers are automatically placed between product tiers to protect quality of the products during packaging and shipment.



PALLETS BUFFER

Increased efficiency

For capacity from 10 to 2000 pallets, the pallet buffer ensures consistent operation and efficient rate within the production line.



EQUIPMENT FOR INSULATED BLOCKS

Polystyrene insertion device

Mounted on one side of the press in a secure and safe area.

This device requires only one operator.



BATCHING & MIXING PLANTS



HIGH QUALITY SERVICES

Projects defined after a thorough technical analysis:


- Complete design and manufacture of the entire batch plant
- Integration of the mixer based on your requirements
- Centralized operating console (automation, weighing, moisture control, concrete delivery and overall production management)
- Technical upgrading of existing equipment

CUSTOMIZED DESIGN

Our engineers will analyse your project to ensure the design and implementation of our equipment match your needs and suit your manufacturing processes properly.





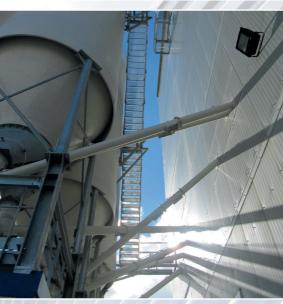







Complete range of machine options

Mortarless block systems

- Mortarless construction system with unit heights grinded to exact specifications to be assembled using thin glue instead of mortar
- This system reduces construction time and cost, improves quality and assures a cleaner worksite

Production process

- Off-line grinding: introduce units from the yard to the grinding machine and a separate cuber
- On-line grinding: introduce units straight from the lowerator to the grinding machine and cubing line

Easy integration of the equipment

• Simultaneous grinding on both sides of the unit (patented), a simple and effective process

Cleaning and maintenance

- Easy accessibility
- Quick change tooling

Reduced noise and dust

- Vacuum system to remove dust
- Soundproof exterior to reduce noise









